

TECHNICAL SHEET

RIGID RECTANGULAR DOWNSPOUT



DESCRIPTION

Rigid steel rectangular downspout is installed at the base of the standard rectangular downspout in order to provide a rigid shock-absorbing drainage system. This rigid downspout replaces the lower section of the standard downspout and was built specifically for areas where the risk of impact or vandalism is higher. The rigid and ultra-resistant material used for this downspout is ideal for public places at high risk of collisions such as commercial, industrial and institutional buildings.

MANUFACTURING

Rigid downspouts are made from 1/8" (3mm) thick galvanized steel. All parts, the four (4) hangers and the directional spout are assembled and welded at the factory. Once the assembly is complete, everything is hot-dip galvanized.



FINISHING

After the galvanizing step, the downspout is coated with a primer for galvanized steel and covered with two coats of baked enamel paint.

DIMENSION

Rectangular tubular : 102 x 152 mm (4 in x 6 in)

Standard length : 2440 mm (8'-0 in) other dimensions available upon request

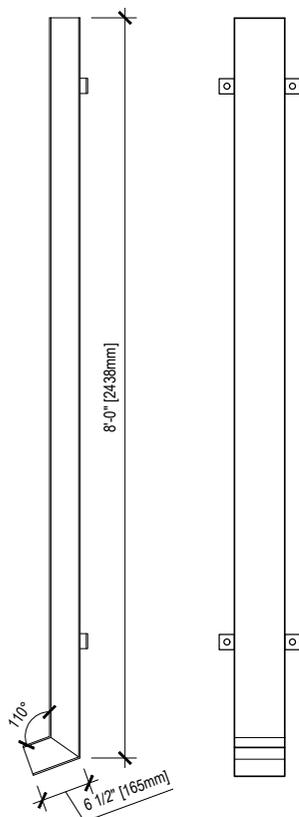

NOTE 1

Ground clearance :
Minimum 12" (305 mm)
16" (410 mm) is recommended

